

Recibido: 25 de Septiembre del 2009 /Aceptado: 28 de Octubre del 2009
Publicado en línea: 30 de Diciembre del 2009

Numerical Simulation of the Field Confinement in a Quasiperiodic Multilayered Microsphere as an Application of the Software Engineering

Gennadiy Burlak¹, A. Díaz-de-Anda¹, René Santaolaya Salgado², Moisés González García².

¹Centro de Investigación en Ingeniería y Ciencias Aplicadas,
Universidad Autónoma del Estado de Morelos, Cuernavaca, Mor. Mexico.

² Departamento de Ciencias Computacionales, Centro Nacional de
Investigación y Desarrollo Tecnológico CENIDET, Cuernavaca, Mor., México

gburlak@uaem.mx

Resumen. Estudiamos numéricamente el control del espectro de frecuencias de nano-emisores puestos en una micro-esfera recubiertas con una pila cuasi periódica. Se investiga la evolución espectral de transmisión con el cambio de espesor de bloques de dos capas, contruidos siguiendo la secuencia de Fibonacci. Encontrado básicamente un comportamiento no lineal en dicho sistema: cuando el número de capas (el orden de Fibonacci) aumenta, la estructura del espectro de transmisión adquiere una forma fractal. Nuestros cálculos muestran el confinamiento y una mejora gigantesca del campo, cuando la relación entre el ancho de las capas en la pila (parámetro de control) está cerca del valor de la regla de oro. Se discute también la necesidad de un código de programación estructura orientada a objetos, para el estudio numérico de tal sistema no lineal.

Abstract. We numerically study control of the frequency spectrum of nanoemitters placed in a recently constructed microsphere with a quasiperiodic spherical stack. The spectral evolution of transmittance at the change of thickness of two-layer blocks, constructed following the Fibonacci sequence, is investigated. We found essentially nonlinear behaviour in such a system: when the number of layers (Fibonacci order) increases the structure of transmittance spectrum acquires a fractal form. Our calculations show the confinement and gigantic field enhancement when the ratio of layers widths in the stack (control parameter) is close to the golden mean value. The necessity of object-oriented structure of the program code for numerical study of such a nonlinear system is also discussed.

Key words: nanosystem, microsphere, quasiperiodic stack, numerical calculations, control of radiation.

1. Introduction.

The use of microcavities and microspheres in advanced optoelectronics has provided a new view of various effects and interactions in highly integrated, functional photonic devices. A fundamental question in this area is how to drastically increase the spectral optical field strength, using artificially produced alternating layers on the surface of a microsphere. Nowadays, the basic regime of the operation for bare (uncoated) dielectric microspheres is the whispering gallery mode (WGM) [1]. But since fabricating the coated dielectric spheres of the submicron sizes [2], the problem arises to study the optical oscillations in microspheres beyond the WGM regime for harmonics with small spherical numbers. These possibilities allow expansion of the essential operational properties of microspheres with attractive artificial light sources for advanced optical technologies. The important optical property of a periodic alternating spherical stack is the possibility of confining the optical radiation (see ([3] and references therein). However, is periodicity necessary for such resonant optical effects?

In order to answer this question, we have studied the optical radiation of a nanosource (nanometer-sized light source) placed into a microsphere coated by a quasiperiodic multilayered structure (stack) constructed following the Fibonacci sequence.

Such structures are called quasiperiodic and, lie outside the constraints of periodicity. One of the main properties of such a stack is

re-reflections of the electromagnetic waves from the interfaces of the layers that result in the collective wave contributions. The collective optical effects in a quasiperiodic spherical stack are appreciated only if the number of layers in the stack is large enough. In this case, various approximations based on the decomposition of field states in the partial spherical modes have insufficient accuracy, so a deeper insight requires more advanced approaches. Our approach is based on the dyadic Green's function technique [5] that provides an advanced approximation for a multilayered microsphere with nanoemitters [6]. We have applied this approach to a quasiperiodic spherical stack and found substantially enhanced optical resonances (Green function strength), when the ratio of the layers width in two-layer blocks in the stack (quasiperiodicity parameter) is close to the golden mean value. As far as the author is aware, the optical fields of nanoemitters placed in a microsphere with a quasiperiodic spherical stack still have been poorly considered, though it is a logical extension of previous work in this area.

This Report is organized as follows. In Section 2, we formulate our approach and basic equations for optical fields in a dielectric multilayered microsphere. We outline the numerical scheme of applying the dyadic Green function (DGF) technique to evaluate the spectrum of a nanoemitter placed in such a quasiperiodic system. We found the enhanced field peaks of such a parameter is close to the golden mean value.

Section 3, outlining the structure of our object-oriented program code and the details of our program realization is discussed. In Section 4, we present our numerical results on the structure of the cavity field states and resonances. In the Section 5 the fractal structures of the resonances in a microsphere with quasiperiodic spherical stack independently of the quasiperiodicity parameter is discussed. We find the enhanced field peaks if such a parameter is close to the golden mean value. In the last Section, we summarize our results.

2. Basic equations.

The A one dimensional quasiperiodic (QP) spherical stack, where a Fibonacci sequence is considered, can be constructed following a simple procedure [4]. Let us consider two neighbors 2-layers segments, long and short, denoted, respectively, by **L** and **S**. If we place them one by one onto the surface of a microsphere, we obtain a sequence: **LS**. In order to obtain a QP sequence, these elements are transformed according to Fibonacci rules as follows: **L** is replaced by **LS**, **S** is replaced by **L**. As a result, we obtain a new sequence: **LSL**. Iteratively applying this rule, we obtain, in the next iteration, a sequence with a five-element stack **LSLLS**, and so on. One can control the properties of such a QP stack by the use of a control parameter γ . For the stack with N-elements, where $N \gg 1$, the ratio of numbers of long to short elements is the golden mean value, $\Gamma_0 = 1.618$.


Generally, in spherical geometry, the wave field depends on, position of a source and, it

is formed on a distance scale of the order magnitude of the radius of the microsphere

or thickness of nanolayers of a stack. For analysis of such a spectrum, it is necessary to use a more advanced approach: the Green function method.

The base of the latter is a representation of the optical field, radiated by a nanosource in a coated microsphere, as a weighed superposition (sum) of forward and backward waves (reflected from the layers interfaces). We consider a situation where the radiating point source (nanoemitter) is placed into microsphere coated by a quasiperiodic stack. In this case, the frequency spectrum is not described longer by a spectrum of a bare microsphere slightly perturbed by the external stack. If the number of layers is large enough, we have to study the photons field taking into account the spectral contributions of both the bottom microsphere and a quasiperiodic stack. In order to calculate the properties of such a field, we apply the Green function technique. In this case, a nanosource corresponds to a nanorod or quantum dot that recently was employed in experiments with microspheres, see [10], [7] and references therein.

Fig. 1: Geometry of system.

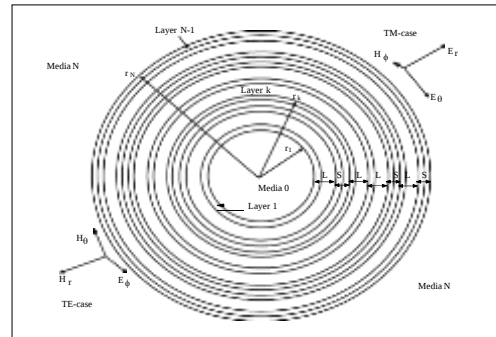

The spatial scale of the nanoemitter objects ($\approx 1\div 100$)nm is at least one order of magnitude smaller than the spatial scale of the microspheres ($\approx 10^3\div 10^4$)nm. Therefore, in the coated microsphere we can represent the nanoemitter structure as a point source placed at $\mathbf{r}'$ and having a dipole moment $\mathbf{d}_0$. It is well known that the solution of the wave equation for the radiated electromagnetic field $\mathbf{E}(\mathbf{r})$ is due to a general source $\mathbf{J}(\mathbf{r})$, [8], [9]

$$\mathbf{E}(\mathbf{r}) = i\omega\mu_0 \int_V d\mathbf{r}' \mathbf{G}(\mathbf{r}, \mathbf{r}', \omega) \mathbf{J}(\mathbf{r}') \quad (1)$$

where $\mathbf{G}(\mathbf{r}, \mathbf{r}', \omega)$ is the dyadic Green function (DGF), which contains all the physical information necessary for describing the multilayered structure.

Following the approach [5], we write down DGF of such a system as follows:

$$\mathbf{G}(\mathbf{r}, \mathbf{r}', \omega) = \mathbf{G}^V(\mathbf{r}, \mathbf{r}', \omega) + \mathbf{G}^{(fs)}(\mathbf{r}, \mathbf{r}', \omega) \quad (2)$$

where $\mathbf{G}^V(\mathbf{r}, \mathbf{r}', \omega)$ represents the contribution of the direct waves from the radiation sources in the unbounded medium, and $\mathbf{G}^{(fs)}(\mathbf{r}, \mathbf{r}', \omega)$ describes the contribution of the multiple reflection and transmission waves due to the layer interfaces. The dyadic Green's tensor $\mathbf{G}^V(\mathbf{r}, \mathbf{r}', \omega)$ in Eq. (2) is given by

$$\mathbf{G}^{(fe)}(\mathbf{r}, \mathbf{r}', \omega) = \frac{ik_\zeta}{4\pi} \sum_{p=e} \sum_{m=1}^{\infty} \sum_{l=0}^m \frac{2m+1}{m(m+1)} \times \frac{(m-l)!}{(m+l)!} (2 - \delta_{0l}) \mathbf{G}_{pml}^{(f,e)}(\mathbf{r}, \mathbf{r}', \omega), \quad (3)$$

where $\mathbf{G}_{pml}^{(f,e)}(\mathbf{r}, \mathbf{r}', \omega)$ is the particular Green tensor, m is the spherical, l is the azimuth

quantum numbers, and $k_i = \omega n_i/c$, $n_i = (\epsilon_i(\omega))^{1/2}$ is the refraction index.

3. Program realization.

Calculation of a frequency spectrum of nanoemitter radiation in a layered microsphere is a rather difficult problem in the use of computer resources, and also on the complexity of the program code organization. Our realization includes two main blocks. The first one contains the code with a description of the structure of a layered microsphere, while the second block is responsible for the dynamic calculation of a frequency spectrum and the radial distribution of an electromagnetic field in the microsphere. Other blocks of the program realize the graphic support, the data exchange, and also the mathematical library of the special functions used for evaluation of the Green function.

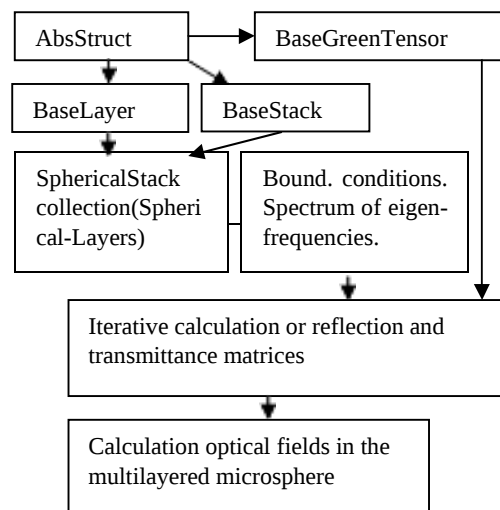


Fig. 2. The hierarchy of main classes in the program code.

The organization of the program with such a level of complexity certainly requires the object-oriented approach that provides

the modularity and structure of an object-oriented computer program. It is based on several techniques, including inheritance, modularity, polymorphism, and encapsulation. In our structure (see Fig. 2), the self-contained class **AbsStruct** defines the abstract characteristics of a microsphere, including its characteristics (fields or properties) and the microsphere's behaviors (methods). The base of the class hierarchy of a microsphere contains two basic classes **BaseLayer** and **BaseStack** (with general parent class **AbsStruct**); in those, the structure (materials and the sizes) of a layered microsphere is memorized. The structure of the field is described by the base class **BaseGreenTensor** that mainly contains the description of the distribution of the optical fields equation (2) and scattering matrices (arrays) used to solve equation (1). Since a number of analytical approaches for low-layered microspheres (with 1 or 2 layers) was developed, we used a possibility to compare analytical and numerical solutions to evaluate the accuracy of our calculations. To do that, we used a general conception of polymorphism that allowed us to treat derived class members (e.g. 2-layered microspheres) just like their parent class's members. More precisely, in this case the polymorphism provided us the ability to use objects belonging to different types of coated microspheres (1 or 2-layers system) to respond to method calls of methods according to an appropriate type-specific behavior.

At top of the class hierarchy, there is a class-successor (*microsphere + field*) that

contains among other data two methods of the class: 1) collections of the layers that are defined by physical definition of the microsphere parameters, and 2) findings of matrixes of dispersion, calculated in agreement with the boundary conditions imposed on the field in a microsphere.

Our program has a graphic user interface (GUI) to input all parameters of a microsphere, nanoemitters and parameters of the optical fields, see Figure 5. As a result, the program calculates various dependencies, e.g., the frequency spectrum of coefficient reflection and transmittance of a stack, the spatial distribution of the optical field, real and imaginary parts of the Green function of the system, etc. The algorithm is completely realized in **C#** program language. The visualization of graphical dependencies is prepared by means of a standard package **TeeChart** (*Steema Software* (R)).

4. Numerical Results.

The following parameters have been used in our calculations: the geometry of the system is $A\{L(B,C)...S(B,C)...\}D$, where letters **A**, **B**, **C**, and **D** indicate the materials in the spherical stack, respectively. The distinct two-layered blocks

L(B,C) and **S(B,C)** are stacked according to the Fibonacci generation rule with control parameter γ being the ratio of layers.

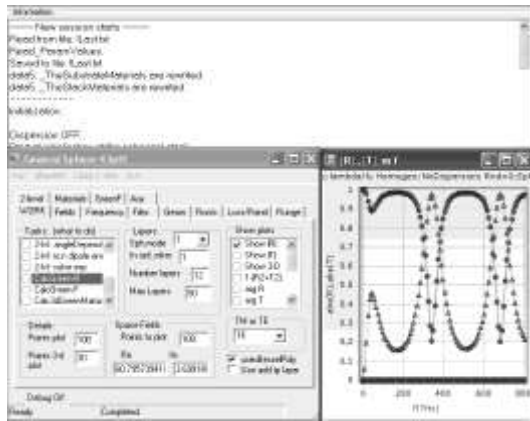


Fig. 3. Graphical user interface and example calculation of the reflection and transmittance coefficients.

For **L** and **S** blocks we use the notation $\mathbf{L}=(\mathbf{B}, \mathbf{C}, 1)$ and $\mathbf{L}=(\mathbf{B}, \mathbf{C}, \gamma)$, where γ is the ratio of both thicknesses. In order to study the behavior of the field in the microsphere, we have calculated the frequency spectrum of the transmittance coefficient T and the corresponding spectrum of imaginary parts of the Green's function $W \equiv \text{Im}(G_{\phi\phi}(r, r, \omega))$, where r is the position of a nanoemitter, $\omega=2\pi f$. We have calculated the evolution of a spectrum for different values γ and also for different numbers of layers in the spherical stack (Fibonacci order F_n) for a range [300-600] THz, or [1000-500] nm. The most intensive optical peak was found for the F_9 stack, where $\gamma=0.618=1/\Gamma_0$ ($\Gamma_0=1.618$ is the golden mean value). The details of the field spectra are shown in Figure 1 for 68 layers in the stack (34 of 2-layers blocks, order Fibonacci is F_9). We observe from Figure 1 that such a spectrum consists of peaks with various amplitudes; however, the most intensive peak with $W=87$ is located at 436.1THz (details of this peak are shown in

the inset). Thus, even though the periodicity

peak of the field is clearly seen.

We have also calculated the evolution of a


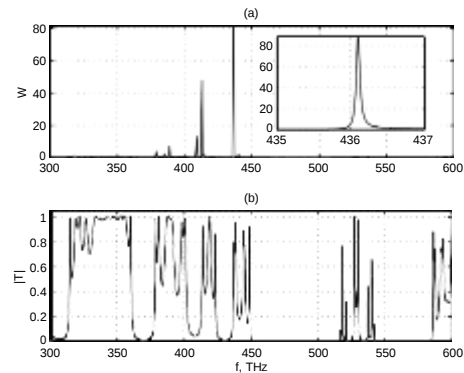


Fig. 4. (a) imaginary parts of tangential component of the Green's function $W=G_{\phi\phi}(r, r)$ for $r=900\text{nm}$; (b) Frequency spectrum of transmittance coefficient T for spherical quantum number $m=9$. Microsphere is coated by quasiperiodic stack with $N=68$ (34 of 2-layers blocks, order Fibonacci F_9) for $\gamma=0.618$. See details in text.

spectrum for different values γ close to $\gamma=$

$1/\Gamma_0$ for a fixed number of layers in the spherical stack (Fibonacci order F_n). The results are displayed in Figure 3 for the range [430-440] THz, or [697-681] nm. One can see that in this area, the spectrum consists of

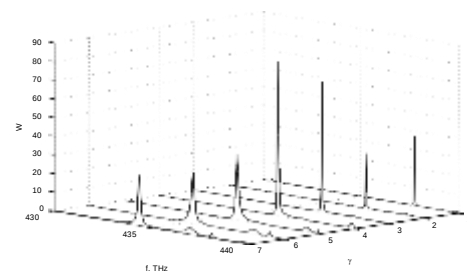

of the stack is broken, well defined intensive

Fig. 5 . Spectrum of imaginary part of the Green's function $W=G_{\varphi\varphi}(r,r)$ for $r=900\text{nm}$ and 68 layers in stack (34 of 2-layer blocks F_9) for different values of parameter quasiperiodicity γ close to the golden mean value: 1) 0.55, 2) 0.58, 3) 0.6, 4) 0.618, 5) 0.63, 6) 0.65, 7) 0.68.

rather narrow resonances, and a set of satellite peaks appears around the main peak. The intensity of this peak changes with

of photons through such a structure into the outer space obviously is small.

a different γ , giving rise to another mainpeak, which corresponds to another quasi- periodic stack.

When γ approaches to $1/\Gamma_0=0.618$, the field peaks become sharper, as shown in Figure 3. We observe that the amplitude of resonances is maximal for case $\gamma=0.618$

In previous figures, the frequency spectrum of the field ($\sim \text{Im}(G_{\square\square}(r,a,f))$) for the quasiperiodic stack was shown. The fractal complicity of the transmittance spectrum is defined by the intrinsic properties of the quasiperiodic spherical stack independently of the nanoemitter location. However, in experiments, it is important to identify the spatial distribution of the field radiated by nanosources located in such a quasiperiodic microsphere. Therefore, it is of interest to consider the spatial field distribution in a cross-section contained both center of the coated microsphere and nanoemitter for some resonant frequency. Such a distribution is shown in Figure 4 for the most intensive resonance at $f_0=436.098$ THz (see Figure 5), when the quasiperiodicity parameter $\gamma=0.618$. We observe from Figure 6 that $\text{Im}(G_{\square\square}(r, a, \phi))$ has a very sharp peak in the place of the nanosource location. Such a spatial field structure may be treated as a confinement of the electromagnetic energy $\sim \text{Im}(G_{\square\square}(r, r))$ [6] inside the coated microsphere. The leakage

We observe from Figure 6 that the field structure inside of the quasiperiodic stack is anisotropic and quite intricate, but the field distribution beyond the coated microsphere has a periodic character.

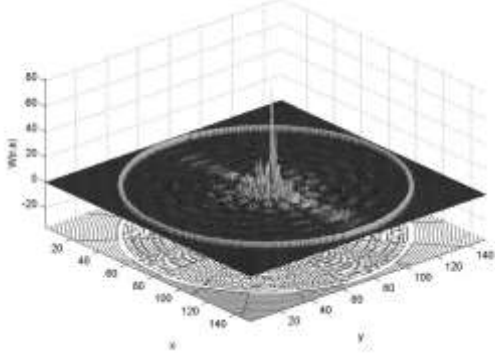


Fig. 6. Spatial structure $W(r, \phi) = \text{Im}(G_{\phi\phi}(r, a, \phi))$ in a cross-section $0 < r < 21 \mu\text{m}$ and $0 < \phi < 2\pi$ of the microsphere with quasiperiodic stack for eigenfrequency $f = 436.09 \text{ THz}$. A nanoemitter is placed at point $a = 900 \text{ nm}$. Other parameters are as in Figure 2. One can see the confinement of field in the stack. Outer cycle indicates the external boundary $R_{\text{ext}} = 13.8 \mu\text{m}$ of the quasiperiodic spherical stack.

5. Fractal structure.

As mentioned above, with a further increase of the Fibonacci order F_j , the structure of $|T|$ becomes more indented, see Figure 4. One can see from Figure 4(a) that in a vicinity $f = 425 \text{ THz}$, the splitting occurs, and here a new extreme of $|T|$ has arisen. A new maxima (and minima) reshape the initially smooth form of the transmittancy spectrum to a well expressed fractal structure. In order to calculate the fractal dimension numerically, it is normally assumed that the fractal is lying on an evenly-spaced grid; then count how many boxes are required to cover it. Such a dimension is calculated by seeing how this number changes as we make the grid finer. If

$N(c)$ is the number of boxes of side length c required to cover the fractal, then the fractal (box-counting) dimension D_H is defined as: $D_H = \lim[\ln N(c)/\ln(1/c)]$ at $c \rightarrow 0$ (see e.g. (Mandelbrot, 1982), (Falconer, 1990)). Let us note that the numerical estimation D_H for a finite set is a rather difficult problem and requires a great amount of data. In our approach, we have formed the fractal by sequential elimination of quasiband gaps with values less than ϵ . Such an approach is similar to the Cantor set generation, where the set is created by repeatedly deleting the middle third of a set of line segments.

It is of interest to calculate the fractal dimension D_H for other materials in a quasiperiodic spherical stack. In particular, we studied the change of D_H for a case where the difference of refraction indexes for neighboring layers in the stack is less. We have considered D_H for stack with MgO ($n = 1.72$, 1-st layer), while the material of 2-nd layer SiO_2 was the same as before. In this case, the difference of the refraction indexes $\Delta = 0.26$ is less with respect to the previous case. Our calculations show that the transmittance frequency spectrum for such a configuration is less indented than the previous case. Calculated fractal dimension for such a stack is $D_H = 0.965$; which is close to 1; thus the fractal properties for a stack with small Δn is less pronounced.

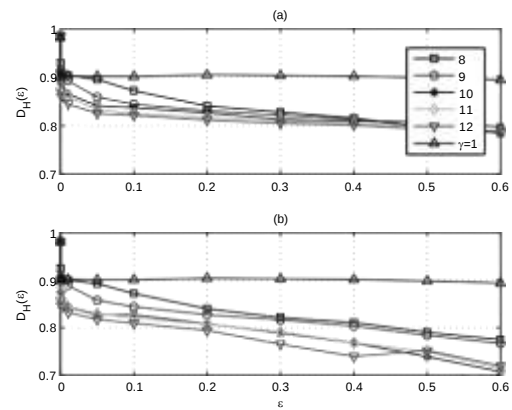


Fig. 7. Fractal (capacity) dimension $D_H(\epsilon)$ for Fibonacci stack F_j with $j=8\div 12$ and $\gamma=0.5$. The last curve shows the periodic stack case with F_{∞} and $\gamma=1$. (a) lossless stack; (b) dissipative stack.

It is worth noting that the details of the optical field radiated by a nanoemitter incorporated into a microsphere depend on the position of such a nanoemitter. In general, such a field can be studied with the use of the above developed Green function technique. However, the latter is not necessary in a case where only the transmittance properties of a quasiperiodic spherical stack are of interest.

6. Conclusion.

We have studied the frequency spectrum of nanoemitters placed in a microsphere with a quasiperiodic subwavelength spherical stack. We found that the transmittance spectrum of such a stack consists of quasiband gaps and narrow resonances induced by re-reflection of optical waves. We show that the width of resonant peaks in the frequency spectrum becomes *extremely narrow* for a quasiperiodic spherical stack of a high Fibonacci order. In principle, that allows creating a narrow-band filter with a

transmission state within the forbidden
band gap of nanoemitters, incorporated in
such a

coated microsphere. We have found confinement and gigantic enhancement of the optical field in a quasiperiodic structure when the ratio of layers width in two-layer blocks of the stack is close to the golden mean value. This allows us to confine resonantly the field energy in the quasiperiodic stack in a very narrow frequency range in order to create very selective stop-band filters. Incorporating nanoemitters into such structured microspheres can open new opportunities for the active control of light nanosources.

7. References.

- [1] Braginsky, V.B., et.al., Quality-factor and nonlinear properties of optical whispering-gallery modes. 1989. *Phys. Lett. A*.137, 393.
- [2] Gourevich, I., et al., Polymer Multilayer Particles: A Route to Spherical Dielectric Resonators. 2006. *Macromolecules*. 39, 1449.
- [3] Burlak, G.,. *The Classical And Quantum Dynamics Of The Multispherical Nanostructures*. Imperial College Press, 2004.
- [4] Vyacheslav R. Misko, Sergey Savel'ev, and Franco Nori.: *Critical currents in superconductors with quasiperiodic pinning arrays: One-dimensional chains and two-dimensional Penrose lattices*. *Phys. Rev. B*. 74 024522 (2006).
- [5] Le-Wei Li; Pang-Shyan Kooi; Mook-Seng Leong; Tat-Soon Yee.: *IEEE Trans. Microwave Theory*. 42 2302 (1994).
- [6] Burlak, G., Chavez, A.: Frequency spectrum and confinement of optical radiation of nanorods in multilayered microsphere. *Optics Commun*. 268 330 (2006).
- [7] B. Mller, U. Woggon, M. V. Artemyev, R. Wannemacher.: Mode control by nanoengineering light emitters in spherical microcavities. *Appl. Phys. Lett*. 83 2686 (2003).
- [8] Chew W.: *Waves and Fields in Inhomogeneous Media*. IEEE Press, New York (1996).
- [9] Jackson J.D.: *Classical electrodynamics*. JOHN Willey, Sons. (1975)
- [10] T. F. Smith, M. S. Waterman.: Identification of Common Molecular Subsequences. *J. Mol. Biol*. 147, 195-197 (1981).
- [11] Landau, L.D., Lifschitz, E. M.: *Statistical Physics Part 2*. Oxford, England, Pergamon Press. (1981).



Dr. Gennadiy Burlak En 1975 estudio la Licenciatura y Maestría en la Universidad Nacional de Kiev (KNU), en la Facultad de Física y en el Departamento de Física Teórica. El Ph.D. (candidato en Ciencias físico - matemáticas) y el D.Sc. (Doctor en Ciencias físico - matemáticas), los obtuvo también en la KNU en 1979 y 1988, respectivamente. Actualmente es Profesor-Investigador Titular "C" definitivo del Centro de Investigaciones en Ingeniería y Ciencias Aplicadas (CIICAp) de la Universidad Autónoma del estado de Morelos (UAEM), desde 1998.

El Dr. Burlak es autor y coautor de cuatro libros y 116 artículos en revistas arbitradas. Ha participado en 118 ponencias en congresos nacionales e internacionales. Destaca su labor en la formación de recursos humanos, en los últimos tres años, ha dirigido 2 tesis de doctorado, 3 de maestría y 1 de licenciatura.

Desde 2000 es miembro del Sistema Nacional de Investigadores, donde tiene el

Nivel II. Es miembro regular de la Academia de Ciencias de Morelos, de la American Physical Society (1994 - a la fecha). Se desempeño también como Arbitro del CONACyT de proyectos de Investigación Científica Básica y como Referee de las revistas internacionales "Physics Letters A"; "Physica-D".

LINEAS DE INVESTIGACION

- Las investigaciones de multicapas micro-esféricas, optimización de los parámetros electromagnéticos y radiación óptica de micro-esferas activas cubiertas.
- Óptica cuántica. Emisión espontánea. Entanglement.
- Los problemas de interacciones de ondas no-lineales en sólidos limitados, fibras, guías de ondas de la óptica integrada, formación de estructuras disipativas. Dinámica no-lineal del Bose-Einstein condensate.