

Efficiency of the variable fidelity design optimization method with variable complexity models

Eficiencia del Método de Optimización del Diseño de Fidelidad Variable con Modelos de Complejidad Variable

Gilberto Mejía Rodríguez 

Centro de Investigación y Estudios de Posgrado, Facultad de Ingeniería
Universidad Autónoma de San Luis Potosí, San Luis Potosí, 78290, México
gilberto.mejia@uaslp.mx

KEYWORDS:

Scaling methods, Different degree of nonlinearity, Different number of design variables, Variable fidelity

ABSTRACT

The goal of this investigation is to provide a deeper understanding about a variable fidelity optimization algorithm and some scaling methods through three test problems. The first two problems are analytic, and the third one is a structural optimization problem. The test problems have been specifically constructed to look for insights regarding the use in the algorithm of models (high fidelity and low fidelity models) with different degree of nonlinearity and different number of design variables. Performance of the variable fidelity framework for first order and second order scaling methods (multiplicative and additive), is compared to a standard sequential quadratic programming optimization performed on the high fidelity model. The main contributions of this investigation are the insights gained with the specifically constructed test problems, which can be extended to other problems, about the use of a trust region variable fidelity framework, and the choice of the most suitable scaling methods depending on the case study at hand. In addition, results show how a reduction in the design cycle time can be obtained, by reducing the number of high fidelity function calls while achieving convergence.

PALABRAS CLAVE:

Métodos de escalamiento, Diferente grado de no-linealidad, Diferente número de variables de diseño, Fidelidad variable

RESUMEN

El objetivo de esta investigación es mejorar la comprensión del algoritmo de fidelidad variable y de diversos métodos de escalamiento a través de tres problemas. Los primeros dos problemas son analíticos, y el tercero es un problema de optimización estructural. Los problemas han sido contruidos específicamente para comprender el funcionamiento del algoritmo con modelos (alta y baja fidelidad) de diferente grado de no-linealidad y diferente número de variables de diseño. El rendimiento del algoritmo al usar diversos métodos de escalamiento de primero y segundo orden (aditivo y multiplicativo), es comparado con el rendimiento de usar programación cuadrática secuencial solamente sobre el modelo de alta fidelidad. La principal contribución de esta investigación es la comprensión ganada con los problemas propuestos, lo cual puede extenderse a otros problemas, sobre el alcance y limitantes del algoritmo, y la elección del método de escalamiento más apropiado dependiendo del caso de estudio que se tenga. Además, los resultados muestran como una reducción del tiempo de diseño puede obtenerse, mientras se reduce el número de evaluaciones al modelo de alta fidelidad y se alcanza convergencia.

1 INTRODUCTION

In the design process the low fidelity models are typically much cheaper to evaluate, but designs produced using these models neglect important physics or details included in the more expensive higher fidelity models. Variable fidelity model management methods have been developed to solve optimization problems that involve computationally intensive simulation. Linking the optimizer to the low fidelity model makes the design process tractable. The high fidelity model is sampled after each sequence of low fidelity optimization as part of a trust region model management strategy that drives convergence of the optimization to the high fidelity solution [1-5]. A formal proof of convergence was developed in [2,3], that ensures that the optimization process converges to a solution of the original problem. In the variable fidelity algorithm, scaling methods produce a transformation or scaling function that can transform the low fidelity model to match the high fidelity model.

In the literature one can find methods that work with a similar motivation as variable fidelity methods (conduct optimization on an inexpensive surrogate model). Some of these methods are: successive approximate optimization (SAO) algorithms [6], space mapping techniques [7], and others that sequentially refine the surrogate model through the optimization process [8,9]. Variable fidelity methods can further reduce computational cost by using a function similar to a response surface, where a low fidelity model provides a global approximation which is locally corrected using a scaling function to produce a better overall approximation of the high fidelity function.

In the literature one can find significant work that make use of variable fidelity optimization, and the most relevant to our investigation are described next.

A first-order model management optimization methodology was presented in [10] for solving high-fidelity optimization problems with minimal expense in high-fidelity function and derivative evaluation. The applicability to general models was demonstrated on two computational studies of aerodynamic optimization, where the differences between the high and low fidelity models was on the mesh size and in the equation that is used (Navier-Stokes or Euler equations). Variable-complexity optimization was used in [11], to aerodynamic shape design problems with the objective of reducing the total computational cost

of the optimization process. The differences between the high and low fidelity models considered the use of different levels of fidelity in the analysis models, and the use of different sets of design variables. Results showed that variable-fidelity methods using different physical models were not as successful as those which used the same model. The authors argued that no correction could compensate for the omission of the physical characteristics of the problem, and that the method was only relevant for optimization problems for which all the design variables had a similar physical meaning. In [12], it was shown that first-order consistency can be insufficient to achieve acceptable convergence rates in practice, and presented new second-order additive, multiplicative, and combined corrections which can significantly accelerate convergence of surrogate-based optimization (SBO) methods. The authors presented three test problems, and the main goal of the investigation was to show the superior converge rate of second order corrections in all the test problems.

It is important to note that in the aforementioned works [10,11], both the high and low fidelity models used the same number of variables. On the other hand, even though the work in [12] compares different scaling models in examples where the high and low fidelity models have variable complexity, the studies are somehow general. This work goes deeper on the characteristics and circumstances under which the additive scaling method can be preferred over the multiplicative, and vice versa, and a first order method can be preferred over the second order method.

Therefore, the goal of this investigation is to show new insights about a trust region variable fidelity algorithm and scaling methods through three specifically constructed test problems. Performance of the variable fidelity framework for first order and second order scaling methods (multiplicative and additive), is compared to the standard sequential quadratic programming (SQP) optimization performed on the high fidelity model. The insights gained can be extended to other problems, about the use of the framework with models that differ in the degree of non-linearity and in the number of design variables, to choose the most suitable scaling methods depending on the case study at hand.

2 METHODOLOGY

This section presents the variable fidelity model management framework, and a brief description of the

first and second order multiplicative and additive scaling methods is presented.

2.1 VARIABLE FIDELITY (VF) IN DESIGN

In the design process a common engineering practice is to drive the preliminary design using lower fidelity models as surrogates of expensive high fidelity simulations. Higher fidelity models are then used in the final design stages to refine the design. However, using automated optimization methods at this stage may still require enormous computational resources. The variable fidelity model management framework addresses this problem by incorporating both models, the lower fidelity model and the higher fidelity model, into one optimization framework [13]. The low fidelity models are scaled to approximate the simulations results based on high fidelity models. Therefore, optimization can be performed using mainly low fidelity simulations, reducing the overall computational cost, while requiring only a few high fidelity simulations to update a scaling function that drives the low fidelity simulations towards the optimal design.

2.2 THE VARIABLE FIDELITY OPTIMIZATION ALGORITHM

The framework used in this investigation for variable fidelity optimization is depicted in Figure 1 [13], and is designed to reduce the number of high fidelity function calls during the optimization process by using a scaling function and lower fidelity models. The following steps are the basic steps of the framework:

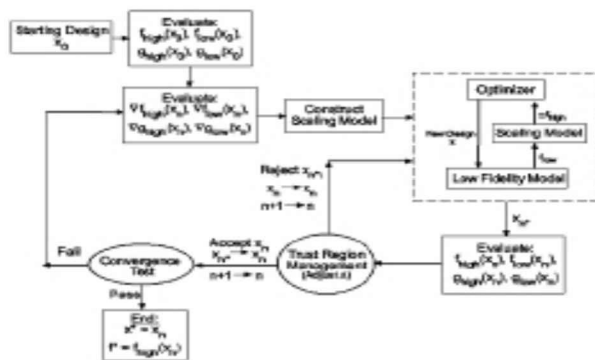


Figure 1. Variable fidelity model management framework.

Step 1 (Initialization): At the starting design point x_0 , the objective function is evaluated using both $f_{high}(x_0)$ and $f_{low}(x_0)$, the high and low fidelity models respectively. All of the high and low fidelity inequality

and equality constraints $g_{high}(x_0)$, $g_{low}(x_0)$, $h_{high}(x_0)$ and $h_{low}(x_0)$ are also evaluated. In addition the initial trust region size is specified.

Step 2 (Gradient evaluation): The gradients of the objective for both the high and low-fidelity models are evaluated at the current design point x_n , as well as the Jacobian for the constraints.

Step 3 (Construct scaling model): A scaling model is constructed to ensure matching between the different fidelity models. This model can be based on many different methods; additive and multiplicative are the most common, see section 2.3.

Step 4 (Optimize scaled low fidelity model): The optimization process is carried out using the SQP optimizer from the function `fmincon`, which is provided in the Matlab's Optimization Toolbox.

Step 5 (Evaluate new design and F penalty function): A new candidate point x_n^* is found as a result of solving the optimization problem in step 4. At this new candidate point, the high-fidelity objective, $f_{high}(x_n^*)$, and constraints $g_{high}(x_n^*)$ and $h_{high}(x_n^*)$ are evaluated. The objective and constraint values are used to calculate a current value of the penalty function F for the high-fidelity and scaled low-fidelity models, which will be used in step 6. The penalty function is defined as

$$F(x) = f(x) + 1/\mu_n \sum \max(0, g_i(x)) + 1/\mu_n \sum |h_j(x)| \quad (1)$$

In Equation (1), μ is the penalty weight that is typically decreased by a factor of 10 each time a new point is accepted. This penalty weighting drives all the active constraints to zero as the algorithm converges.

Step 6 (Trust region management): In order to help guarantee convergence of the variable fidelity optimization framework, a trust region model management strategy is employed. This method provides a means for adaptively managing the allowable move limits for the approximate design space. A trust region ratio allows the trust region model management framework to monitor how well the approximation matches the high fidelity design space. The trust region ratio, ρ_n , is calculated at the new candidate point x_n^* , as

$$\rho_n = (F(x_n)_{high} - F(x_n^*)_{high}) / (F(x_n)_{scaled} - F(x_n^*)_{scaled}) \quad (2)$$

In Equation (2), $F()_{high}$ and $F()_{scaled}$ are the penalty functions for the high and scaled low fidelity models, and the point x_n is the current best design at iteration n . The trust region size is governed by the following standard rules [14]:

$$\Delta(n+1) = \begin{cases} c_1 \Delta_n: \rho_n \leq R_1 \vee \rho_n \geq R_3 \\ \Delta_n: R_1 < \rho_n < R_2 \\ \Gamma \Delta_n: R_2 < \rho_n < R_3 \end{cases}$$

In Equation (3), $\Gamma = c_2$ if $\|x^{*n} - x_n\|_{\infty} = \Delta_n$, otherwise $\Gamma = 1$. A typical set of values for the range limiting constants are $R_1 = 0.25$, $R_2 = 0.75$ and $R_3 = 1.25$, while the trust region multiplication factors are typically $c_1 = 0.3$ and $c_2 = 2$. If ρ is near one, the approximation is quite good. If ρ is near zero, then the approximation is not as good, but it still captures the minimization trend. If ρ is negative, then the point is a worse design. In this case the point is rejected, the trust region size is reduced by the factor c_1 , and the algorithm returns to step 4. As long as $\rho > 0$, the point is accepted and the algorithm proceeds to step 7.

Step 7 (Convergence Test): Convergence can be determined by the following stopping criterion:

$$\|f_{high}(x_n) - f_{high}(x_{n-1})\| / \|f_{high}(x_{n-1})\| < \varepsilon_f \quad (4)$$

$$\|x_n - x_{n-1}\| / \|x_{n-1}\| < \varepsilon_x \quad (5)$$

In Equations (4) and (5), ε_f and ε_x are tolerances supplied by the user, and n is the current iteration counter. If any of the two inequalities in Equations (4)-(5) at the current point are true, the algorithm is considered converged. If the convergence test is true, then the final design is found, otherwise, the algorithm returns to step

2.3 SCALING METHODS

The additive and multiplicative scaling models are used to construct an unknown scaling function to update the lower fidelity model, which in turn, will approximate the higher fidelity model. Each method can be modeled as first order or second order, and the goal is to match the gradient and curvature of the high fidelity model respectively. It is important to remember that at least first order matching between the scaled low fidelity model and the high fidelity model is required for proof

of convergence.

2.3.1 MULTIPLICATIVE SCALING MODEL

This method was devised by Alexandrov and Lewis [15] based on [16]. For the first order multiplicative scaling method see [17], and for multiplicative second order scaling see [18,19]. As described in step 3 from the variable fidelity optimization algorithm, a given set of high and low fidelity models, $f_{high}(x)$ and $f_{low}(x)$, where $(x \rightarrow x)$, can be matched by multiplying the low fidelity model by an unknown function $\beta(x)$, which is called the multiplicative scaling function. This is posed mathematically as

$$f_{high}(x) = \beta(x) f_{low}(x) \quad (6)$$

Solving for the unknown multiplicative scaling function results in

$$\beta(x) = f_{high}(x) / f_{low}(x) \quad (7)$$

From inspection of Equation (7), it is shown that the function $\beta(x)$ is the scaling ratio of the high fidelity model to the low fidelity model, and when it is multiplied by the low fidelity model, the high fidelity model is achieved. However, the exact scaling function $\beta(x)$ is not known and must be approximated.

2.3.2 FIRST ORDER AND SECOND ORDER MULTIPLICATIVE SCALING.

At a given design point, for example the current design, the scaling function is defined as

$$\beta(x_n) = f_{high}(x_n) / f_{low}(x_n) \quad (8)$$

This scaling factor at any other point can be approximated using a Taylor series to first order

$$\beta(x) \approx \beta(x_n) + \nabla \beta(x_n)^T (x - x_n) \quad (9)$$

To evaluate this, the gradient information is needed and can be obtained by differentiating Equation (8), resulting in

$$\nabla \beta(x_n) = \frac{\begin{bmatrix} f_{low}(x_n) \frac{\partial f_{high}}{\partial x_1} - f_{high}(x_n) \frac{\partial f_{low}}{\partial x_1} \\ \vdots \\ f_{low}(x_n) \frac{\partial f_{high}}{\partial x_m} - f_{high}(x_n) \frac{\partial f_{low}}{\partial x_m} \end{bmatrix}}{f_{low}(x_n)^2} \quad (10)$$

where m is the number of design variables. Therefore, a first order update on the low fidelity model is:

$$f_{high} \approx \beta(x) \quad (11)$$

This model ensures that at the initial design point, the updated low fidelity model matches the function and the gradient of the high fidelity model. The identical process is done in order to scale each constraint.

An analogous approach to the first order method is followed to obtain the multiplicative second order scaling method. The scaling factor can be approximated using a Taylor series to second order

$$\beta(x) \approx \beta(x_n) + \nabla \beta(x_n)^T \Delta x + 1/2 \Delta x^T \nabla^2 \beta(x_n) \Delta x \quad (12)$$

To evaluate Equation (12), the Hessian information is needed and can be obtained by differentiating Equation (10). Computing this symmetric full rank matrix would be quite expensive; therefore, Hessian update methods such as BFGS and SR1 can be used to compute these terms. Now a second order update on the low fidelity model can be obtained, and it has the same form as in the first order method (Equation (11)).

2.3.3 ADDITIVE SCALING MODEL

The additive method was presented by Lewis and Nash [20]. For additive second order scaling see [18,19].

A given set of high and low fidelity models, $f_{high}(x)$ and $f_{low}(x^r)$, where $(x^r \in x)$, can also be matched by adding the low fidelity model to an unknown function $\gamma(x)$. This is expressed mathematically as.

$$f_{high}(x) = f_{low}(x^r) + \gamma(x) \quad (13)$$

In Equation (13), solving for the additive scaling function results in

$$\gamma(x) = f_{high}(x) - f_{low}(x^r) \quad (14)$$

It is clear that when this function is added to the low fidelity model, the response of the high fidelity model is obtained.

2.3.4 FIRST ORDER AND SECOND ORDER ADDITIVE SCALING

In a similar fashion to the first order multiplicative scaling

method, the additive scaling function at a given design point has the value

$$\gamma(x_n) = f_{high}(x_n) - f_{low}(x_n^r) \quad (15)$$

This additive scaling factor at any other point can be approximated using a Taylor series to first order

$$\tilde{\gamma}(x) \approx \gamma(x_n) + \nabla \gamma(x_n)^T (x - x_n) \quad (16)$$

which requires gradient information that can be obtained by differentiating Equation (15). This gives

$$\nabla \gamma(x_n) = \nabla f_{high}(x_n) - \nabla f_{low}(x_n^r) \quad (17)$$

Therefore, a first order update on the low fidelity model is

$$f_{high} \approx f_{low} + \tilde{\gamma}(x) \quad (18)$$

This model ensures that at the current design point, the updated low fidelity model matches both the function and the gradient of the high fidelity model exactly, which is required for proof of convergence.

An analogous approach to the first order method is followed to obtain the additive second order scaling method. The scaling factor can be approximated using a Taylor series to second order

$$\tilde{\gamma}(x) \approx \gamma(x_n) + \nabla \gamma(x_n)^T \Delta x + 1/2 \Delta x^T \nabla^2 \gamma(x_n) \Delta x \quad (19)$$

To evaluate this, the Hessian information is needed and can be obtained by differentiating Equation (17). Computing this symmetric full rank matrix would be quite expensive, that is why Hessian update methods such as BFGS and SR1 are used to compute these terms. Now a second order update on the low fidelity model can be obtained, and it has the same form as in the first order method (Equation (18)).

3 TEST CASES

This section will present the three problems that have been specifically constructed to provide a deeper understanding about a variable fidelity optimization algorithm and some scaling methods. In addition, the three test problems are used to compare the savings offered by each scaling method and their convergence.

Two analytic problems were created to study the influence of having lower number of variables in the low

fidelity model, and of being of lower order, with respect to the high fidelity model, where one problem uses a two-dimensional high fidelity model of degree 6, and the other uses a four-dimensional high fidelity model of degree 4. A third problem, a high-performance low-cost structure, was created to study the influence of having significantly lower number of variables in the low fidelity model, with respect to the high fidelity model.

In order to solve the problems, first order and second order scaling for the multiplicative and additive methods were implemented in the variable fidelity framework. Traditionally the cost of the second order methods has been prohibitive. In order to completely avoid the extra function calls required to compute the symmetric full rank Hessian matrix, consecutive first order information is used to approximate it. Two of the most popular methods to approximate the Hessian are the BFGS and SR1 methods. In all test problems, all gradient information was obtained using forward finite differences.

In this investigation, an important question that is intended to be answered is whether or not the results and behavior of the scaling methods, in terms of convergence and required high fidelity functions calls, would be similar in all test problems while keeping constant certain characteristics (difference in number of variables and degree of nonlinearity between the HF and LF models). In addition, the three proposed test problems are intended to help in analyzing a variety of case study scenarios, in order to be able to decide what type of scaling method is preferred, depending on the case study at hand and the difference between the high and low fidelity models.

In order to compare the methods, the number of high fidelity function calls was computed for each method. For comparison purposes, the number of function calls needed for a standard SQP optimization performed on the high fidelity model alone is also presented for each problem. In addition, the results will show how a reduction in the design cycle time can be obtained by using a cheap and simple low fidelity model, while reducing the number of high fidelity function calls and achieving convergence to the high fidelity optimal design.

Analytic Problem 1

This problem is similar to the two dimensional model presented in [13], and aims to study the influence of having lower number of variables in the low fidelity model, and of being of lower order, with respect to the high fidelity model.

The high fidelity model is a degree four high fidelity

model with four design variables. On the other hand, the most complex low fidelity model is a variation of the high fidelity model, which adds linear and nonlinear noise factors to change the shape of the design space and location of the optima.

Table 1 shows the high fidelity (HF) model, and fourteen low fidelity (LF) models with variable complexity, where the most complex is four dimensional of degree four, and the less complex is a constant. Note that constraints are not shown for all the low fidelity models, however constraints are considered equal among models with equal number of design variables.

HF Model (4 variables, degree 4)	$f_{high} = 4x_1^4 + x_2^2 + 2x_3^2 + 5x_4^2 + x_1x_2^2 + x_1x_3 + x_1x_4^2 + x_2^2x_3 + x_2^2x_4^2 + x_3x_4^2$ $g_{high} = \frac{1}{x_1} + \frac{1}{x_2} + \frac{1}{x_3} + \frac{1}{x_4} - 2 \leq 0$
LF Model (4 variables, degree 4)	$f_{low} = 4(x_1 + 0.1)^2 + (x_2 - 0.1)^2 + 2(x_3 + 0.1)^2 + 5(x_4 - 0.1)^2 + x_1x_2^2 + x_1x_3 + x_1x_4^2 + x_2^2x_3 + x_2^2x_4^2 + x_3x_4^2 + 0.1$ $g_{low} = \frac{1}{x_1} + \frac{1}{x_2 + 0.1} + \frac{1}{x_3} + \frac{1}{x_4 + 0.1} - 2 - 0.1 \leq 0$
LF Model (4 variables, degree 3)	$f_{low} = 4(x_1 + 0.1)^2 + (x_2 - 0.1)^2 + 2(x_3 + 0.1)^2 + 5(x_4 - 0.1)^2 + x_1x_2^2 + x_1x_3 + x_1x_4^2 + x_2^2x_3 + x_3x_4^2 + 0.1$
LF Model (4 variables, degree 2)	$f_{low} = 4(x_1 + 0.1)^2 + (x_2 - 0.1)^2 + 2(x_3 + 0.1)^2 + 5(x_4 - 0.1)^2 + x_1x_2 + x_1x_3 + x_1x_4 + x_2x_3 + x_2x_4 + x_3x_4 + 0.1$
LF Model (4 variables, degree 1)	$f_{low} = 4(x_1 + 0.1) + (x_2 - 0.1) + 2(x_3 + 0.1) + 5(x_4 - 0.1) + 0.1$
LF Model (3 variables, degree 3)	$f_{low} = 4(x_1 + 0.1)^2 + (x_2 - 0.1)^2 + 2(x_3 + 0.1)^2 + x_1x_2^2 + x_1x_3 + x_1x_4^2 + 0.1$ $g_{low} = \frac{1}{x_1} + \frac{1}{x_2 + 0.1} + \frac{1}{x_3} - 2 - 0.1 \leq 0$
LF Model (3 variables, degree 2)	$f_{low} = 4(x_1 + 0.1)^2 + (x_2 - 0.1)^2 + 2(x_3 + 0.1)^2 + x_1x_2 + x_1x_3 + x_2x_3 + 0.1$
LF Model (3 variables, degree 1)	$f_{low} = 4(x_1 + 0.1) + (x_2 - 0.1) + 2(x_3 + 0.1) + 0.1$
LF Model (2 variables, degree 3)	$f_{low} = 4(x_1 + 0.1)^2 + (x_2 - 0.1)^2 + x_1x_2^2 + 0.1$ $g_{low} = \frac{1}{x_1} + \frac{1}{x_2 + 0.1} - 2 - 0.1 \leq 0$
LF Model (2 variables, degree 2)	$f_{low} = 4(x_1 + 0.1)^2 + (x_2 - 0.1)^2 + x_1x_2 + 0.1$
LF Model (2 variables, degree 1)	$f_{low} = 4(x_1 + 0.1) + (x_2 - 0.1) + 0.1$
LF Model (1 variable, degree 3)	$f_{low} = 4(x_1 + 0.1)^2 + 0.1$ $g_{low} = \frac{1}{x_1} - 2 - 0.1 \leq 0$
LF Model (1 variable, degree 2)	$f_{low} = 4(x_1 + 0.1)^2 + 0.1$
LF Model (1 variable, degree 1)	$f_{low} = 4(x_1 + 0.1) + 0.1$
LF Model (0 variables, degree 0)	$f_{low} = 0.1$ $g_{low} = -2 - 0.1 \leq 0$

Table 1. High fidelity model and low fidelity models for test problem 1.

The variable fidelity model management framework used separately the HF model with each of the 14 LF models, which resulted in 14 case studies. For all these cases, the initial design point considered was [5,5,5,5] T, and the design variables were bounded between 0.5 and 8. In addition, all the methods converged to the same solution, the optimum of the high fidelity model, and all used the same convergence criteria of $\epsilon x = \epsilon f = 0.0001$.

The use of the SQP optimizer on the high fidelity model resulted in the optimum design of [2.3, 1.9, 2.7, 1.5]T, with function value of 102.8, and a total of 13

iterations and 82 function evaluations were required for convergence.

Figure 2 shows the number of high fidelity function calls required by the variable fidelity model management framework for the 14 cases studies, as a result of using the aforementioned multiplicative (Mul) and additive (Add) scaling methods (first order, second order BFGS, and second order SR1). Also, for comparison purposes with the SQP results, the 82 high fidelity function evaluations required by the SQP optimizer are represented by a horizontal red line. In addition, this figure shows that the most competitive methods with respect to the required SQP HF function evaluations are: second order additive BFGS (Add BFGS), second order additive SR1 (Add SR1), and first order additive (Add 1st).

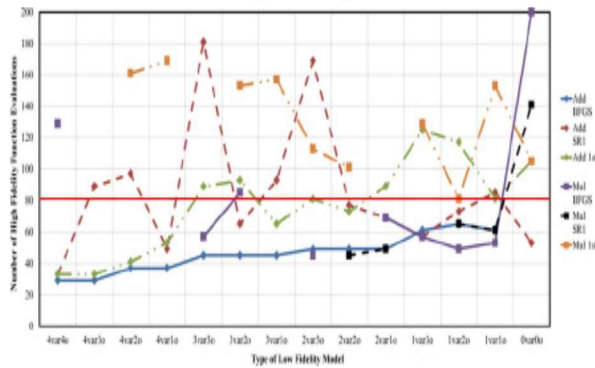


Figure 2. Variable Fidelity Optimization results for analytic test problem 1.

The results from Figure 2 can be summarized in Table 2, where the best scaling methods can be easily identified for case scenarios where there could be a small or big difference between the HF and LF models. In the last section, the results from Table 2 will be compared to the results obtained in the other test problems to get to a final conclusion.

Case scenarios	Best scaling methods		
Small difference in # of variables	Add. BFGS	Add. 1 st	
Big difference in # of variables		Add. 1 st	Add. SR1
Small difference in the degree of nonlinearity	Add. BFGS	Add. 1 st	
Big difference in the degree of nonlinearity	Add. BFGS	Add. 1 st	Add. SR1
Small total difference	Add. BFGS	Add. 1 st	
Big total difference		Add. 1 st	Add. SR1

Table 2. Best scaling methods for different case scenarios

3.2 ANALYTIC PROBLEM 2

The Barnes Problem [21] will be used as a high fidelity model to study the influence of having lower number of variables in the low fidelity model, and of being of lower order, with respect to the high fidelity model. The problem consists of a degree six high fidelity model with two design variables, and even though the problem has only two design variables, the high-order nonlinearities make it challenging to solve.

Table 3 shows the high fidelity (HF) model, and 13 low fidelity (LF) models with variable complexity, where the most complex is two dimensional of degree six, and the less complex is a constant. Note that constraints are not shown for all the low fidelity models, but constraints are equal among models with equal number of design variables.

The variable fidelity model management framework used separately the HF model with each of the 13 LF models, which resulted in 13 case studies. For all these cases the initial design point considered was [30,30]^T, and the design variables were bounded between 0 and 70. In addition, all the methods converged to the same solution, the optimum of the high fidelity model, and all used the same convergence criteria of $\epsilon x = \epsilon f = 0.0001$.

The use of the SQP optimizer on the high fidelity model resulted in the optimum design of [49.5, 19.6]^T, with function value of -31.6451, and a total of 9 iterations and 30 function evaluations were required for convergence.

HF Model (2 var., deg. 6)	$f_{1198} = a_1 + a_2x_1 + a_3x_2^2 + a_4x_1^2 + a_5x_2^2 + a_6x_1x_2 + a_7x_1x_2 + a_8x_1^2x_2 + a_9x_2^2x_2 + a_{10}x_1^2x_2^2 + a_{11}x_1^2x_2^2 + a_{12}x_1^2x_2^2 + a_{13}x_1^2x_2^2 + a_{14}x_1^2x_2^2 + a_{15}x_1^2x_2^2 + a_{16}x_1^2x_2^2 + a_{17}x_1^2x_2^2 + a_{18}x_1^2x_2^2 + a_{19}x_1^2x_2^2 + a_{20}x_1^2x_2^2 + a_{21}x_1^2x_2^2 + a_{22}x_1^2x_2^2 + a_{23}x_1^2x_2^2 + a_{24}x_1^2x_2^2 + a_{25}x_1^2x_2^2 + a_{26}x_1^2x_2^2 + a_{27}x_1^2x_2^2 + a_{28}x_1^2x_2^2 + a_{29}x_1^2x_2^2 + a_{30}x_1^2x_2^2$ $g_{1198} = \frac{x_1x_2}{700} - 1 \geq 0$ $g_{1198} = \frac{x_1^2}{25} - \frac{x_2^2}{25} \geq 0$ $g_{1198} = \left(\frac{x_2}{50} - 1\right) - \left(\frac{x_1}{500} - 0.11\right) \geq 0$
LF Model (2 var., deg. 6)	$f_{100} = a_1 + a_2x_1 + a_3x_2^2 + a_4 x_1^2 + a_5x_1x_2 + a_6x_2^2x_2 + a_7x_1^2x_2 + a_8x_1^2x_2 + a_9x_1^2x_2 + a_{10}x_1^2x_2 + a_{11}x_1^2x_2 + a_{12}x_1^2x_2 + a_{13}x_1^2x_2 + a_{14}x_1^2x_2 + a_{15}x_1^2x_2 + a_{16}x_1^2x_2 + a_{17}x_1^2x_2 + a_{18}x_1^2x_2 + a_{19}x_1^2x_2 + a_{20}x_1^2x_2 + a_{21}x_1^2x_2 + a_{22}x_1^2x_2 + a_{23}x_1^2x_2 + a_{24}x_1^2x_2 + a_{25}x_1^2x_2 + a_{26}x_1^2x_2 + a_{27}x_1^2x_2 + a_{28}x_1^2x_2 + a_{29}x_1^2x_2 + a_{30}x_1^2x_2$ $g_{100} = \frac{x_1x_2}{750} - 0.5 \geq 0$ $g_{100} = \frac{x_1^2}{25} - \frac{x_2^2}{25} \geq 0$ $g_{100} = \left(\frac{x_2}{50} - 1\right) - \left(\frac{x_1}{500} - 0.11\right) \geq 0$
LF Model (2 var., deg. 5)	$f_{100} = a_1 + a_2x_1 + a_3x_2^2 + a_4 x_1^2 + a_5x_1x_2 + a_6x_2^2x_2 + a_7x_1^2x_2 + a_8x_1^2x_2 + a_9x_1^2x_2 + a_{10}x_1^2x_2 + a_{11}x_1^2x_2 + a_{12}x_1^2x_2 + a_{13}x_1^2x_2 + a_{14}x_1^2x_2 + a_{15}x_1^2x_2 + a_{16}x_1^2x_2 + a_{17}x_1^2x_2 + a_{18}x_1^2x_2 + a_{19}x_1^2x_2 + a_{20}x_1^2x_2 + a_{21}x_1^2x_2 + a_{22}x_1^2x_2 + a_{23}x_1^2x_2 + a_{24}x_1^2x_2 + a_{25}x_1^2x_2 + a_{26}x_1^2x_2 + a_{27}x_1^2x_2 + a_{28}x_1^2x_2 + a_{29}x_1^2x_2 + a_{30}x_1^2x_2$ $g_{100} = \frac{x_1x_2}{750} - 0.5 \geq 0$ $g_{100} = \frac{x_1^2}{25} - \frac{x_2^2}{25} \geq 0$ $g_{100} = \left(\frac{x_2}{50} - 1\right) - \left(\frac{x_1}{500} - 0.11\right) \geq 0$
LF Model (2 var., deg. 4)	$f_{100} = a_1 + a_2x_1 + a_3x_2^2 + a_4 x_1^2 + a_5x_1x_2 + a_6x_2^2x_2 + a_7x_1^2x_2 + a_8x_1^2x_2 + a_9x_1^2x_2 + a_{10}x_1^2x_2 + a_{11}x_1^2x_2 + a_{12}x_1^2x_2 + a_{13}x_1^2x_2 + a_{14}x_1^2x_2 + a_{15}x_1^2x_2 + a_{16}x_1^2x_2 + a_{17}x_1^2x_2 + a_{18}x_1^2x_2 + a_{19}x_1^2x_2 + a_{20}x_1^2x_2 + a_{21}x_1^2x_2 + a_{22}x_1^2x_2 + a_{23}x_1^2x_2 + a_{24}x_1^2x_2 + a_{25}x_1^2x_2 + a_{26}x_1^2x_2 + a_{27}x_1^2x_2 + a_{28}x_1^2x_2 + a_{29}x_1^2x_2 + a_{30}x_1^2x_2$ $g_{100} = \frac{x_1x_2}{750} - 0.5 \geq 0$ $g_{100} = \frac{x_1^2}{25} - \frac{x_2^2}{25} \geq 0$ $g_{100} = \left(\frac{x_2}{50} - 1\right) - \left(\frac{x_1}{500} - 0.11\right) \geq 0$
LF Model (2 var., deg. 3)	$f_{100} = a_1 + a_2x_1 + a_3x_2^2 + a_4 x_1^2 + a_5x_1x_2 + a_6x_2^2x_2 + a_7x_1^2x_2 + a_8x_1^2x_2 + a_9x_1^2x_2 + a_{10}x_1^2x_2 + a_{11}x_1^2x_2 + a_{12}x_1^2x_2 + a_{13}x_1^2x_2 + a_{14}x_1^2x_2 + a_{15}x_1^2x_2 + a_{16}x_1^2x_2 + a_{17}x_1^2x_2 + a_{18}x_1^2x_2 + a_{19}x_1^2x_2 + a_{20}x_1^2x_2 + a_{21}x_1^2x_2 + a_{22}x_1^2x_2 + a_{23}x_1^2x_2 + a_{24}x_1^2x_2 + a_{25}x_1^2x_2 + a_{26}x_1^2x_2 + a_{27}x_1^2x_2 + a_{28}x_1^2x_2 + a_{29}x_1^2x_2 + a_{30}x_1^2x_2$ $g_{100} = \frac{x_1x_2}{750} - 0.5 \geq 0$ $g_{100} = \frac{x_1^2}{25} - \frac{x_2^2}{25} \geq 0$ $g_{100} = \left(\frac{x_2}{50} - 1\right) - \left(\frac{x_1}{500} - 0.11\right) \geq 0$
LF Model (2 var., deg. 2)	$f_{100} = a_1 + a_2x_1 + a_3x_2^2 + a_4 x_1^2 + a_5x_1x_2 + a_6x_2^2x_2 + a_7x_1^2x_2 + a_8x_1^2x_2 + a_9x_1^2x_2 + a_{10}x_1^2x_2 + a_{11}x_1^2x_2 + a_{12}x_1^2x_2 + a_{13}x_1^2x_2 + a_{14}x_1^2x_2 + a_{15}x_1^2x_2 + a_{16}x_1^2x_2 + a_{17}x_1^2x_2 + a_{18}x_1^2x_2 + a_{19}x_1^2x_2 + a_{20}x_1^2x_2 + a_{21}x_1^2x_2 + a_{22}x_1^2x_2 + a_{23}x_1^2x_2 + a_{24}x_1^2x_2 + a_{25}x_1^2x_2 + a_{26}x_1^2x_2 + a_{27}x_1^2x_2 + a_{28}x_1^2x_2 + a_{29}x_1^2x_2 + a_{30}x_1^2x_2$ $g_{100} = \frac{x_1x_2}{750} - 0.5 \geq 0$ $g_{100} = \frac{x_1^2}{25} - \frac{x_2^2}{25} \geq 0$ $g_{100} = \left(\frac{x_2}{50} - 1\right) - \left(\frac{x_1}{500} - 0.11\right) \geq 0$
LF Model (2 var., deg. 1)	$f_{100} = a_1 + a_2x_1 + a_3x_2^2 + a_4 x_1^2 + a_5x_1x_2 + a_6x_2^2x_2 + a_7x_1^2x_2 + a_8x_1^2x_2 + a_9x_1^2x_2 + a_{10}x_1^2x_2 + a_{11}x_1^2x_2 + a_{12}x_1^2x_2 + a_{13}x_1^2x_2 + a_{14}x_1^2x_2 + a_{15}x_1^2x_2 + a_{16}x_1^2x_2 + a_{17}x_1^2x_2 + a_{18}x_1^2x_2 + a_{19}x_1^2x_2 + a_{20}x_1^2x_2 + a_{21}x_1^2x_2 + a_{22}x_1^2x_2 + a_{23}x_1^2x_2 + a_{24}x_1^2x_2 + a_{25}x_1^2x_2 + a_{26}x_1^2x_2 + a_{27}x_1^2x_2 + a_{28}x_1^2x_2 + a_{29}x_1^2x_2 + a_{30}x_1^2x_2$ $g_{100} = \frac{x_1x_2}{750} - 0.5 \geq 0$ $g_{100} = \frac{x_1^2}{25} - \frac{x_2^2}{25} \geq 0$ $g_{100} = \left(\frac{x_2}{50} - 1\right) - \left(\frac{x_1}{500} - 0.11\right) \geq 0$
LF Model (1 var. x1, deg. 5)	$f_{100} = a_1 + a_2x_1 + a_3x_2^2 + a_4 x_1^2 + a_5x_1x_2 + a_6x_2^2x_2 + a_7x_1^2x_2 + a_8x_1^2x_2 + a_9x_1^2x_2 + a_{10}x_1^2x_2 + a_{11}x_1^2x_2 + a_{12}x_1^2x_2 + a_{13}x_1^2x_2 + a_{14}x_1^2x_2 + a_{15}x_1^2x_2 + a_{16}x_1^2x_2 + a_{17}x_1^2x_2 + a_{18}x_1^2x_2 + a_{19}x_1^2x_2 + a_{20}x_1^2x_2 + a_{21}x_1^2x_2 + a_{22}x_1^2x_2 + a_{23}x_1^2x_2 + a_{24}x_1^2x_2 + a_{25}x_1^2x_2 + a_{26}x_1^2x_2 + a_{27}x_1^2x_2 + a_{28}x_1^2x_2 + a_{29}x_1^2x_2 + a_{30}x_1^2x_2$ $g_{100} = \frac{x_1x_2}{750} - 0.5 \geq 0$ $g_{100} = \frac{x_1^2}{25} - \frac{x_2^2}{25} \geq 0$ $g_{100} = \left(\frac{x_2}{50} - 1\right) - \left(\frac{x_1}{500} - 0.11\right) \geq 0$
LF Model (1 var. x1, deg. 4)	$f_{100} = a_1 + a_2x_1 + a_3x_2^2 + a_4 x_1^2 + a_5x_1x_2 + a_6x_2^2x_2 + a_7x_1^2x_2 + a_8x_1^2x_2 + a_9x_1^2x_2 + a_{10}x_1^2x_2 + a_{11}x_1^2x_2 + a_{12}x_1^2x_2 + a_{13}x_1^2x_2 + a_{14}x_1^2x_2 + a_{15}x_1^2x_2 + a_{16}x_1^2x_2 + a_{17}x_1^2x_2 + a_{18}x_1^2x_2 + a_{19}x_1^2x_2 + a_{20}x_1^2x_2 + a_{21}x_1^2x_2 + a_{22}x_1^2x_2 + a_{23}x_1^2x_2 + a_{24}x_1^2x_2 + a_{25}x_1^2x_2 + a_{26}x_1^2x_2 + a_{27}x_1^2x_2 + a_{28}x_1^2x_2 + a_{29}x_1^2x_2 + a_{30}x_1^2x_2$ $g_{100} = \frac{x_1x_2}{750} - 0.5 \geq 0$ $g_{100} = \frac{x_1^2}{25} - \frac{x_2^2}{25} \geq 0$ $g_{100} = \left(\frac{x_2}{50} - 1\right) - \left(\frac{x_1}{500} - 0.11\right) \geq 0$
LF Model (1 var. x1, deg. 3)	$f_{100} = a_1 + a_2x_1 + a_3x_2^2 + a_4 x_1^2 + a_5x_1x_2 + a_6x_2^2x_2 + a_7x_1^2x_2 + a_8x_1^2x_2 + a_9x_1^2x_2 + a_{10}x_1^2x_2 + a_{11}x_1^2x_2 + a_{12}x_1^2x_2 + a_{13}x_1^2x_2 + a_{14}x_1^2x_2 + a_{15}x_1^2x_2 + a_{16}x_1^2x_2 + a_{17}x_1^2x_2 + a_{18}x_1^2x_2 + a_{19}x_1^2x_2 + a_{20}x_1^2x_2 + a_{21}x_1^2x_2 + a_{22}x_1^2x_2 + a_{23}x_1^2x_2 + a_{24}x_1^2x_2 + a_{25}x_1^2x_2 + a_{26}x_1^2x_2 + a_{27}x_1^2x_2 + a_{28}x_1^2x_2 + a_{29}x_1^2x_2 + a_{30}x_1^2x_2$ $g_{100} = \frac{x_1x_2}{750} - 0.5 \geq 0$ $g_{100} = \frac{x_1^2}{25} - \frac{x_2^2}{25} \geq 0$ $g_{100} = \left(\frac{x_2}{50} - 1\right) - \left(\frac{x_1}{500} - 0.11\right) \geq 0$
LF Model (1 var. x1, deg. 2)	$f_{100} = a_1 + a_2x_1 + a_3x_2^2 + a_4 x_1^2 + a_5x_1x_2 + a_6x_2^2x_2 + a_7x_1^2x_2 + a_8x_1^2x_2 + a_9x_1^2x_2 + a_{10}x_1^2x_2 + a_{11}x_1^2x_2 + a_{12}x_1^2x_2 + a_{13}x_1^2x_2 + a_{14}x_1^2x_2 + a_{15}x_1^2x_2 + a_{16}x_1^2x_2 + a_{17}x_1^2x_2 + a_{18}x_1^2x_2 + a_{19}x_1^2x_2 + a_{20}x_1^2x_2 + a_{21}x_1^2x_2 + a_{22}x_1^2x_2 + a_{23}x_1^2x_2 + a_{24}x_1^2x_2 + a_{25}x_1^2x_2 + a_{26}x_1^2x_2 + a_{27}x_1^2x_2 + a_{28}x_1^2x_2 + a_{29}x_1^2x_2 + a_{30}x_1^2x_2$ $g_{100} = \frac{x_1x_2}{750} - 0.5 \geq 0$ $g_{100} = \frac{x_1^2}{25} - \frac{x_2^2}{25} \geq 0$ $g_{100} = \left(\frac{x_2}{50} - 1\right) - \left(\frac{x_1}{500} - 0.11\right) \geq 0$
LF Model (1 var. x1, deg. 1)	$f_{100} = a_1 + a_2x_1 + a_3x_2^2 + a_4 x_1^2 + a_5x_1x_2 + a_6x_2^2x_2 + a_7x_1^2x_2 + a_8x_1^2x_2 + a_9x_1^2x_2 + a_{10}x_1^2x_2 + a_{11}x_1^2x_2 + a_{12}x_1^2x_2 + a_{13}x_1^2x_2 + a_{14}x_1^2x_2 + a_{15}x_1^2x_2 + a_{16}x_1^2x_2 + a_{17}x_1^2x_2 + a_{18}x_1^2x_2 + a_{19}x_1^2x_2 + a_{20}x_1^2x_2 + a_{21}x_1^2x_2 + a_{22}x_1^2x_2 + a_{23}x_1^2x_2 + a_{24}x_1^2x_2 + a_{25}x_1^2x_2 + a_{26}x_1^2x_2 + a_{27}x_1^2x_2 + a_{28}x_1^2x_2 + a_{29}x_1^2x_2 + a_{30}x_1^2x_2$ $g_{100} = \frac{x_1x_2}{750} - 0.5 \geq 0$ $g_{100} = \frac{x_1^2}{25} - \frac{x_2^2}{25} \geq 0$ $g_{100} = \left(\frac{x_2}{50} - 1\right) - \left(\frac{x_1}{500} - 0.11\right) \geq 0$
LF Model (0 var. x1, deg. 0)	$f_{100} = a_1 + a_2x_1 + a_3x_2^2 + a_4 x_1^2 + a_5x_1x_2 + a_6x_2^2x_2 + a_7x_1^2x_2 + a_8x_1^2x_2 + a_9x_1^2x_2 + a_{10}x_1^2x_2 + a_{11}x_1^2x_2 + a_{12}x_1^2x_2 + a_{13}x_1^2x_2 + a_{14}x_1^2x_2 + a_{15}x_1^2x_2 + a_{16}x_1^2x_2 + a_{17}x_1^2x_2 + a_{18}x_1^2x_2 + a_{19}x_1^2x_2 + a_{20}x_1^2x_2 + a_{21}x_1^2x_2 + a_{22}x_1^2x_2 + a_{23}x_1^2x_2 + a_{24}x_1^2x_2 + a_{25}x_1^2x_2 + a_{26}x_1^2x_2 + a_{27}x_1^2x_2 + a_{28}x_1^2x_2 + a_{29}x_1^2x_2 + a_{30}x_1^2x_2$ $g_{100} = \frac{x_1x_2}{750} - 0.5 \geq 0$ $g_{100} = \frac{x_1^2}{25} - \frac{x_2^2}{25} \geq 0$ $g_{100} = \left(\frac{x_2}{50} - 1\right) - \left(\frac{x_1}{500} - 0.11\right) \geq 0$

Table 3. High fidelity model and low fidelity models for test problem 2.

Figure 3 shows the number of high fidelity function calls required by the variable fidelity model management framework for the 13 case studies, as a result of using the aforementioned multiplicative (Mul) and additive (Add) scaling methods (first order, second order BFGS, and second order SR1). Also, for comparison purposes with the SQP results, the 30 high fidelity function evaluations required by the SQP optimizer are represented by a horizontal red line. In addition, this figure shows that the best method with respect to the required SQP HF function evaluations is the second order additive SR1 (Add SR1), but in general all the other methods are very competitive, depending on the type of LF model.

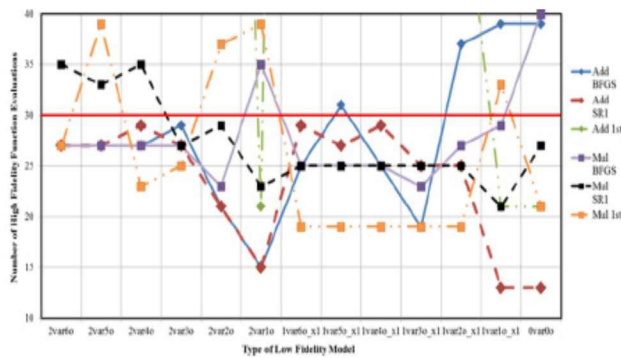


Figure 3. Variable Fidelity Optimization results for analytic test problem 2.

The results from Figure 3 can be summarized in Table 4, where the best scaling methods can be easily identified for case scenarios where there could be a small or big difference between the HF and LF models. In the last section, the result from Table 4 will be compared to the result obtained in the other test problems to get to a final conclusion.

Case scenarios	Best scaling methods		
Small difference in # of variables	Add. SR1	Add. BFGS	Mul. BFGS
Big difference in # of variables	Add. SR1		
Small difference in the degree of nonlinearity	Add. SR1	Add. BFGS	
Big difference in the degree of nonlinearity	Add. SR1	Add. 1 st	
Small total difference	Add. SR1	Add. BFGS	Mul. BFGS
Big total difference	Add. SR1	Add. 1 st	

Table 4. Best scaling methods for different case scenarios.

3.3 Structural Optimization Problem

This is a structural optimization problem in which the objective of the design is to minimize the weight of the structure while maximizing the payload capability. The multi-objective optimization is transformed into a single objective optimization via a cost-performance index. The problem aims to study the influence of having significantly lower number of variables in the low fidelity model, with respect to the high fidelity model. Figure 4 and Figure 5 show the physics-based high and low fidelity structures to be optimized respectively.

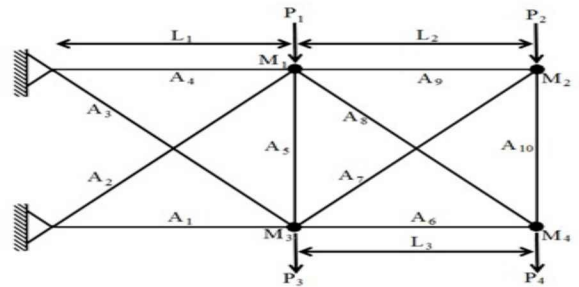


Figure 4. Physics-based high fidelity structure.

The high fidelity model was introduced in [22-23] and consists of a total of 17 design variables (cross sections, trusses topology and payloads) and 13 inequality constraints. The objective is to find the size and shape of the truss such that the weight (W_{tot}) of the structure is minimum (low cost) and the loads (P_i) it is capable of sustain and the payload (M_i) it carries are a maximum (high performance). This multi-objective problem is formulated as a single objective problem by defining a cost-performance index (CPI) which includes each of the objectives as shown in Equation (20). The design variables in this model are the length of the rectangular first bay (L_1) and the top and bottom lengths of the outer bay (L_2 , L_3), the masses (payload) placed on all the unconstrained nodes (M_1 -4), and the areas of truss members (A_1 -10).

The design is decomposed into three disciplines or contributing analysis. The configuration design calculates the weight of the structure (W_{tot}) and the loads (P_i) applied to the structure. The structural design group calculates the deflections (δ_i) and stresses (σ_i) of the truss members. This analysis is performed using a finite element code in which the truss members are modeled as rod elements capable of sustaining axial loads only. A dynamic response design subspace calculates the fundamental frequency (f_{n1}) of the structure.

The structural material used is Aluminum, with the following properties: elastic modulus $E = 70$ GPa, yield strength $\sigma_y = 95$ MPa, and density $\rho = 2770$ kg.m⁻³.

The high fidelity problem is stated as follows [22,23]:

$$\text{Minimize: } f_{\text{high}}(x) = \text{CPI} = w_1 W_{\text{tot}} + (w_2 / (\sum P_i)) + (w_3 / \sum M_i)$$

$$\text{Subject to: } g_1 = 1 - (M_{\text{tot}})_{\text{min}} / (\sum M_i) \geq 0$$

$$g_2 = 1 - (P_{\text{tot}})_{\text{min}} / (\sum P_i) \geq 0$$

$$g_3 = 1 - f(n_{1,\text{min}}) / f_{n1} \geq 0$$

$$g_4 = 1 - |\sigma_{1-10}| / \sigma_y \geq 0$$

$$M^{(1)}(i) \leq M_i \leq M^{(u)}(i) \quad i = 1, \dots, 4$$

$$L^{(l)}(k) \leq L_k \leq L^{(u)}(k) \quad k = 1, \dots, 3$$

$$A^{(l)}(m) \leq A_m \leq A^{(u)}(m) \quad m = 1, \dots, 10$$

where $w_1 = 0.003$, $w_2 = 106$, $w_3 = 3.5 \times 10^6$, $(M_{\text{tot}})_{\text{min}} = 2600$ kg, $(P_{\text{tot}})_{\text{min}} = 50,000$ N, $f_{n1,\text{min}} = 15$ s⁻¹, $M^{(l)}_{1-4} = 100$ kg, $M^{(u)}_{1-4} = 3,000$ kg, $L^{(l)}_{1-3} = 2$ m, $L^{(u)}_{1-3} = 30$ m, $A^{(l)}_{1-10} = 5 \times 10^{-4}$ m², $A^{(u)}_{1-10} = 0.01$ m². The loads P_{1-4} are defined to be functions of the lengths of the bays L_{1-3} and the payload masses M_{1-4} :

$$P_i = \sum_{k=1}^3 (L_k)^{a(i)} (L_k / L_{\text{ref}})^{(-b(k^i))} + \dots + \sum_{j=1}^4 (M_j)^{c(i)} (M_j / M_{\text{ref}})^{(d^i(j))} \quad (21)$$

with $L_{\text{ref}} = 10$ m, $M_{\text{ref}} = 650$ kg. The coefficients a, b, c , and d were taken from [22,23].

The initial design point considered for all case studies was $[10, 10, 10, 800, 800, 800, 800, 0.002, 0.002, 0.002, 0.002, 0.002, 0.002, 0.002, 0.002, 0.002, 0.002, 0.002]$ T.

The use of the SQP optimizer on the high fidelity model resulted in the optimum design of $[2, 3.5, 2, 830.6, 3000, 3000, 3000, 0.0005, 0.01, 0.0005, 0.0021, 0.0005, 0.0005, 0.0005, 0.0005, 0.0005, 0.0005, 0.0005]$ T, with function value of 358.3, and a total of 25 iterations and 453 function evaluations were required for convergence, see Table 5. The convergence criteria used for all case studies related to the structural optimization problem are $\epsilon_x = \epsilon_f = 0.0001$.

The physics-based low fidelity multi-objective problem is formulated as a single objective problem, which includes each of the objectives as shown in Equation (22). In order to relate the high to the low

fidelity model, a correspondence among the variables of both models was chosen. Figure 5 shows the low fidelity structure, and it consists of a total of 8 design variables: cross sections (A_1, A_2, A_4 and A_8), trusses topology (L_1 and L_3) and payloads (M_1 and M_4).

The low fidelity problem is stated as follows:

$$\text{Minimize flow } (x^{\text{r}}) = \text{CPI} = w_1 W_{\text{tot}} + w_2 / (\sum P_i) + w_3 / (\sum M_i)$$

$$\text{Subject to: } g_1 = 1 - ((M_{\text{tot}})_{\text{min}} / (M_1 + M_4)) \geq 0$$

$$g_2 = 1 - ((P_{\text{tot}})_{\text{min}} / (P_1 + P_4)) \geq 0$$

$$g_3 = 1 - ((f_{n1,\text{min}}) / f_{n1}) \geq 0 \quad (22)$$

$$g(4-7) = 1 - (|\sigma_{1,2,4,8}| / \sigma_{\text{yield}}) \geq 0$$

$$M^{(l)}(i) \leq M_i \leq M^{(u)}(i) \quad i = 1, 4$$

$$L^{(l)}(k) \leq L_k \leq L^{(u)}(k) \quad k = 1, 3$$

$$A^{(l)}(m) \leq A_m \leq A^{(u)}(m) \quad m = 1, 2, 4, 8$$

where $w_1 = 0.003$, $w_2 = 106$, $w_3 = 3.5 \times 10^6$, $(M_{\text{tot}})_{\text{min}} = 2600$ kg, $(P_{\text{tot}})_{\text{min}} = 50,000$ N, $f_{n1,\text{min}} = 15$ s⁻¹, $M^{(l)}_{1,4} = 100$ kg, $M^{(u)}_{1,4} = 3,000$ kg, $L^{(l)}_{1,3} = 2$ m, $L^{(u)}_{1,3} = 30$ m, $A^{(l)}_{1,2,4,8} = 5 \times 10^{-4}$ m², $A^{(u)}_{1,2,4,8} = 0.01$ m². The loads $P_{1,4}$ are defined to be functions of the lengths of the bays $L_{1,3}$ and the payload masses $M_{1,4}$. The loads are calculated using Equation (21), but L_2 , M_2 and M_3 are considered as zero.

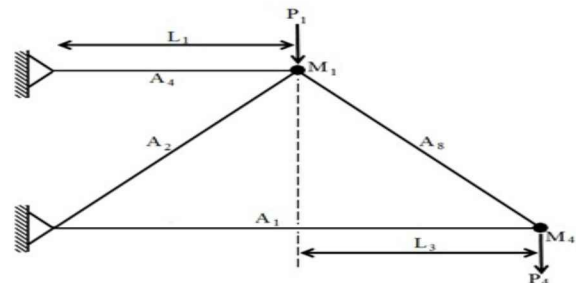


Figure 5. Physics-based low fidelity structure.

Table 5 shows the number of high fidelity function calls required by the variable fidelity model management framework for the structural optimization problem (high and low physics-based fidelity models), as a result of using the aforementioned multiplicative and additive scaling methods (first order, second order BFGS, and second order SR1).

The results show that the most noticeable difference among the methods is that the additive scaling method performs much better than the multiplicative scaling method, being the second order BFGS method the one that offered bigger savings. Furthermore, it can be observed that the multiplicative scaling second order BFGS and SR1 methods did not converge to the optimum solution. This is because optimization aborted due to the division by zero arising from the multiplicative scaling, in the objective function value of the low fidelity model. In addition, the last row shows that the use of the SQP optimizer on the high fidelity model required 453 function evaluations for convergence, which is a higher value than the required by the multiplicative and additive scaling methods.

Method	First order	Second order BFGS	Second order SR1
Multiplicative Scaling	380	-	-
Additive Scaling	382	200	289
SQP	453		

Table 5. High fidelity function evaluations for the structural optimization problem (high and low physics-based fidelity models).

4 CONCLUSIONS

The results of the problems show how models with different degree of nonlinearity and different number of design variables can be handled and integrated efficiently by the trust region model management framework, while significantly reducing the design cycle (number of high fidelity function calls) while achieving convergence.

It was observed in all test problems that the choice of the most suitable scaling methods to solve each of the problems is problem dependent, but still some points can be generalized. The following characteristics highlight in the results:

- The additive scaling method is a more robust method that performs better than the multiplicative scaling method in most cases.

- The first order methods proved to be very competitive in terms of savings, and converged to the optimum designs in all the problems.

- In some cases the multiplicative second order scaling method did not converge to the optimum. This is because optimization aborted due to the division by zero arising from the multiplicative scaling, in the objective function value of the low fidelity model.

- The use of scaling methods in the variable fidelity framework with HF and LF models that are significantly different (even in physics), could be as successful as, or more successful than using models of similar complexity or physics.

In addition, the obtained results can help to answer to the following case study scenarios, in order to be able to decide what type of scaling method is preferred, depending on the case study at hand:

- In case a LF model could be proposed, it would be desirable to build a LF model that consumed the shortest time possible, a cheap and simple model in number of variables and degree of nonlinearity is desired. In case it was considered a LF model as similar as possible to a scalar function (0 variables, 0 degree), the most appropriate methods would be the first order and second order (SR1) additive scaling methods.

- In case it is uncertain the degree of nonlinearity and the number of variables in the HF model, it would be desirable to use a robust scaling model. Some scaling methods that work well independently of the similarity between the HF and LF models are the first order and second order (SR1) additive scaling methods.

- In case there is a big, or small (or no) difference in the degree of nonlinearity between the HF and LF models. The suggested methods for a big difference would be the first order and second order (SR1) additive scaling methods. For a small difference the recommended methods would be the second order (SR1 and BFGS) additive scaling methods.

- In case there is a big, or small (or no) difference in the number of variables between the HF and LF models. The suggested methods for a big difference would be the first order and second order (SR1) additive scaling methods, and the first order multiplicative scaling method. For a small difference the recommended methods would be the second order (SR1 and BFGS) additive scaling methods.

•In case there is a big difference in the degree of nonlinearity, and a big difference in the number of variables, between the HF and LF models, the most appropriate methods would be the first order and second order (SR1) additive scaling methods.

•In case there is a small (or no) difference in the degree of nonlinearity, and a small (or no) difference in the number of variables, between the HF and LF models, the most appropriate methods would be the second order (SR1 and BFGS) additive scaling methods, and the second order (BFGS) multiplicative scaling method.

REFERENCES

1. Alexandrov, N. M., Dennis, J. E., Lewis, R. M., and Torczon, V. A Trust-Region Framework for Managing the Use of Approximation Models in Optimization. *Structural Optimization*. 1998, 15(1), 16-23.
2. Rodriguez, J. F., Renaud, J. E., and Watson, L. T. Convergence of Trust Region Augmented Lagrangian Methods Using Variable Fidelity Approximation Data. *Structural Optimization*. 1998, 15(3-4), 141-156.
3. Rodriguez, J. F., Renaud, J. E., and Watson, L. T. Trust Region Augmented Lagrangian Methods for Sequential Response Surface Approximation and Optimization. *ASME Journal of Mechanical Design*. 1998, 120(1), 58-66.
4. Wujek, B. A. and Renaud, J. E. A New Adaptive Move-Limit Management Strategy for Approximate Optimization, Part 1. *AIAA Journal*. 1998, 36(10), 1911-1921.
5. Wujek, B. A. and Renaud, J. E. A New Adaptive Move-Limit Management Strategy for Approximate Optimization, Part 2. *AIAA Journal*. 1998, 36(10), 1922-1937.
6. Perez, V. M., Renaud, J. E., and Watson, L. T. An Interior-Point Sequential Approximate Optimization Methodology. *Structural Optimization*. 2004, 27(5), 360-370.
7. Bakr, M. H., Bandler, J. W., Madsen, K., Rayas-Sánchez, J. E., and Søndergaard, J. Review of the Space Mapping Approach to Engineering Optimization and Modeling. *Optimization and Engineering*. 2000, 1(3), 241-276.
8. Qian, Z., Seepersad, C. C., Joseph, V. R., Allen, J. K., and Wu, C. F. J. Building Surrogate Models Based on Detailed and Approximate Simulations. *ASME Journal of Mechanical Design*. 2006, 128(4), 668-677.
9. Osio, I. G. and Amon, C. H. An Engineering Design Methodology with Multistage Bayesian Surrogates and Optimal Sampling. *Research in Engineering Design*. 2005, 8(4), 189-206.
10. Alexandrov, N. M. and Lewis, R. M. An Overview of First-Order Model Management for Engineering Optimization. *Optimization and Engineering*. 2001, 2, 413-430.
11. Thokala, P. and Martins, J. R. A. Variable-Complexity Optimization Applied to Airfoil Design. *Engineering Optimization*. 2007, 39(3), 271-286.
12. Eldred, M. S., Giunta, A. A., and Collis, S. S. Second-Order Corrections for Surrogate-Based Optimization with Model Hierarchies. In: *Proceedings of the 10th AIAA/ISSMO Multidisciplinary Analysis and Optimization Conference*. Albany, New York, 2004.
13. Gano, S. E., Renaud, J. E., and Sanders, B. Variable Fidelity Optimization Using a Kriging Based Scaling Function. In: *Proceedings of the 10th AIAA/ISSMO Multidisciplinary Analysis and Optimization Conference*. Albany, New York, 2004.
14. Giunta, A. A. and Eldred, M. S. Implementation of a Trust Region Model Management Strategy in the Dakota Optimization Toolkit. In: *Proceedings of 8th AIAA/NASA/ISSMO Symposium on Multidisciplinary Analysis and Optimization*. Long Beach, CA, 2000.
15. Alexandrov, N. M. and Lewis, R. M. An Overview of First-Order Model Management for Engineering Optimization. *Optimization and Engineering*. 2001, 2, 413-430.
16. Haftka, R. T. Combining Global and Local Approximations. *AIAA Journal*. 1991, 29(9), 1523-1525.
17. Chang, K. J., Haftka, R. T., Giles, G. L., and Kao, P.-J. Sensitivity-Based Scaling For Approximating Structural Response. *Journal of Aircraft*. 1993, 30(2), 283-288.
18. Eldred, M. S., Giunta, A. A., and Collis, S. S. Second-Order Corrections for Surrogate-Based Optimization with Model Hierarchies. In: *Proceedings of the 10th AIAA/ISSMO Multidisciplinary Analysis and Optimization Conference*. Albany, New York, 2004.
19. Gano, S. E., Perez, V. M., and Renaud, J. E. Multi-Objective Variable-Fidelity Optimization of a Morphing Unmanned Aerial Vehicle. In: *Proceedings of the 45th AIAA/ASME/ASCE/AHS/ASC Structures, Structural Dynamics & Materials Conference*. Palm Springs, CA, 2004.
20. Lewis, R. M. and Nash, S. G. A Multigrid Approach to the Optimization of Systems Governed by Differential Equations. In: *Proceedings of the 8th AIAA/USAF/NASA/ISSMO Symposium on Multidisciplinary Analysis and Optimization*. Long Beach, CA, 2000.
21. Barnes, G. K. Master's thesis. The University of Texas. Austin, Texas, 1967.
22. Wujek, B. A., Renaud, J. E., Batill, S. M. A Concurrent Engineering Approach for Multidisciplinary Design in a Distributed Computing Environment. In: N. Alexandrov, M. Y. Hussaini, eds., *Multidisciplinary Design Optimization: State-of-the-Art*. 1997, 80, 189-208.
23. Wujek, B. A., Renaud, J. E., Batill, S. M., Brockman, J. B. Concurrent Subspace Optimization Using Design Variable Sharing in a Distributed Design Environment. *Concurrent Engineering*. 1996, 4(4), 361-377.

Biographies



Gilberto Mejía Rodríguez was born in San Luis Potosí, México, on October 11, 1981. He received his M.S., and Ph.D. degrees in 2007 and 2010 respectively, from the University of Notre Dame, Indiana, United States of America. He is member of the National System of Researchers from CONACYT - México. His research interests include design optimization and automation, structural optimization, materials design optimization and computational mechanics. In addition to research activities, he teaches in undergraduate and graduate programs, and serves as thesis advisor in these programs, and also offers technical consulting to companies in the region.